


8CH IVR

Quick Start Guide



1. Packing.....	P.2
2. Hard Disk Installation.....	P.3
3. Front Panel Controls.....	P.6
4. Rear Panel Connectors.....	P.7

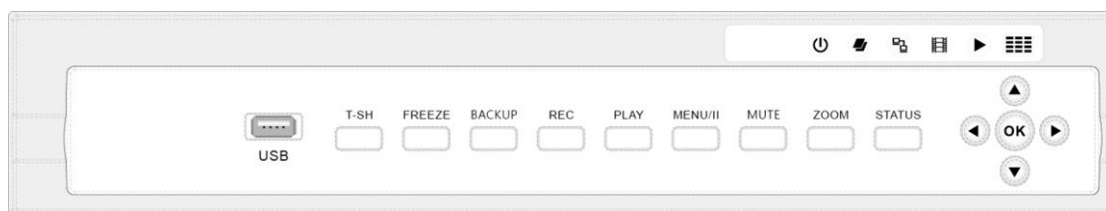

GPL Licensing

This product contains codes which are developed by Third-Party-Companies and which are subject to the GNU Public License ("GPL") or the GNU Lesser Public License ("LGPL"). The GPL Code used in this product is released without warranty and is subject to the copyright of the corresponding author. Further source codes which are subject to the GPL-licenses are available upon request. We provide our modifications to the Linux Kernel, as well as new commands, and tools to get you into the code. The codes are provided on the FTP site, and please download them from the following site or you can refer to your distributor:

FTP site : <http://icatch.azurewebsites.net/GPL/>

1

PACKING


1. IVR
2. Quick Start
3. Battery
4. CD
5. Screws
6. Power Adapter
7. SATA Cord

Note: Standard shipping products do not include HDD

2


HARD DISK INSTALATION

Step 1) Take out the screws as pictures show.

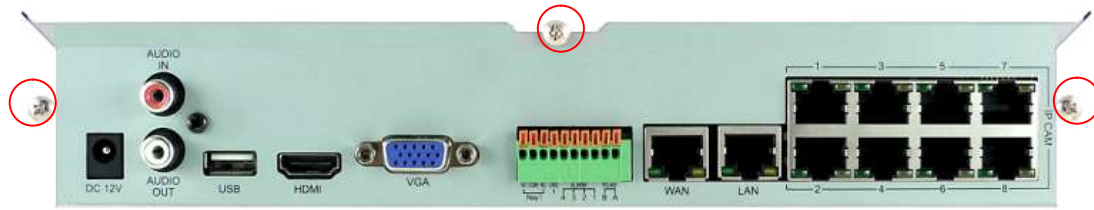


Back panel 3 screws


Step 2) Open the cover as the arrow direction.

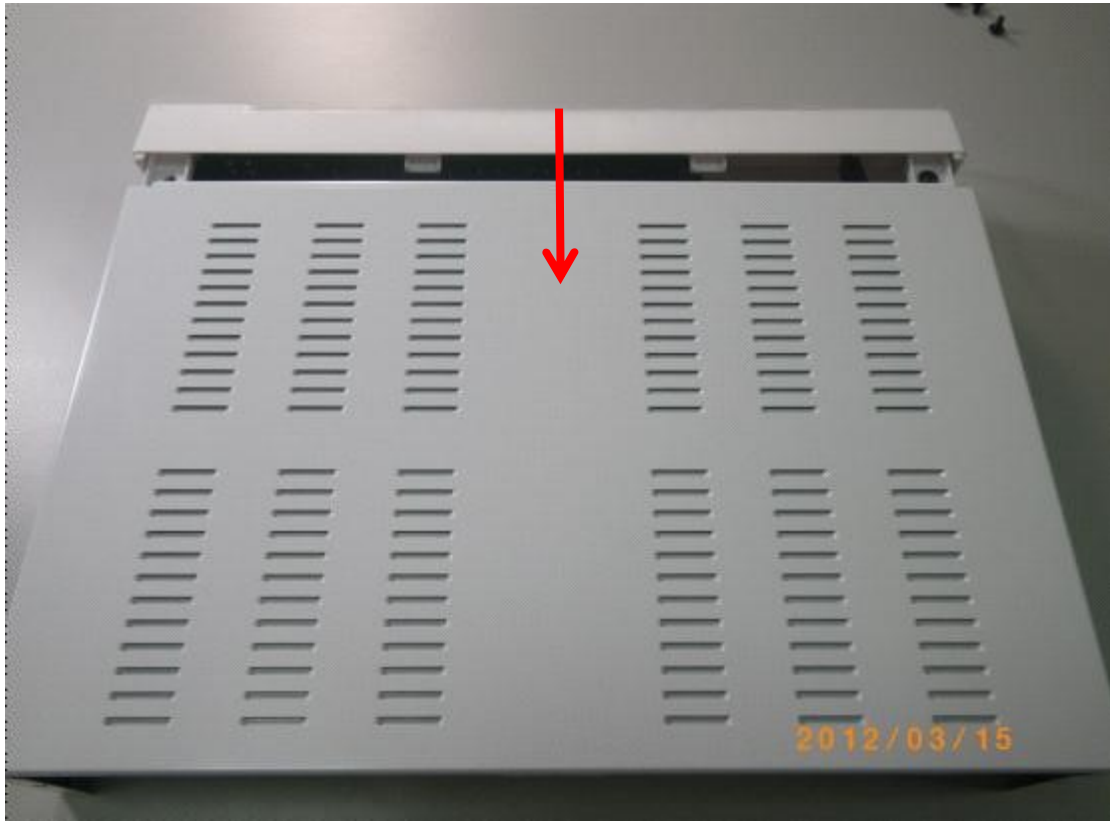


Step 3) Connect SATA & Power wire to Hard Disk and put it on the rack mount.

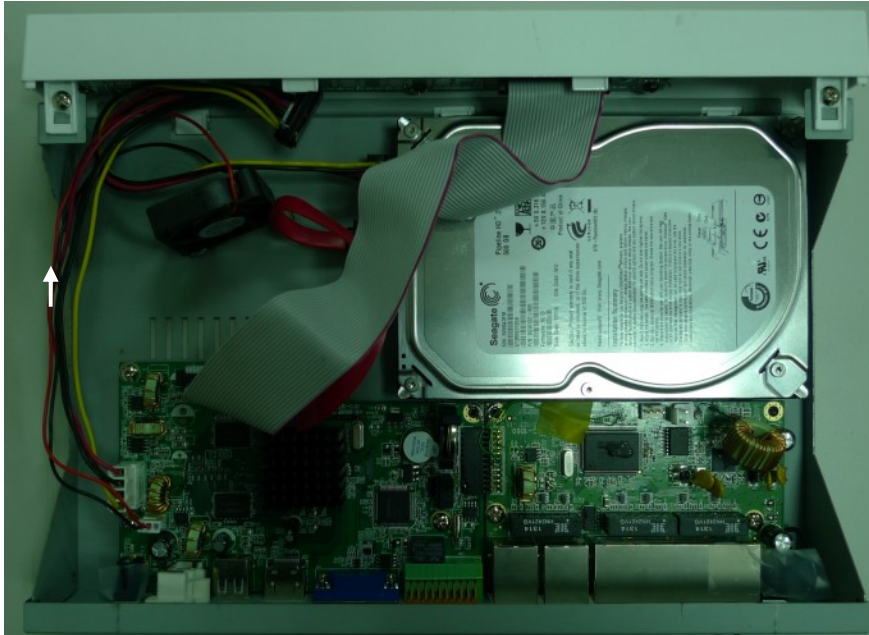

Fix HDD screw

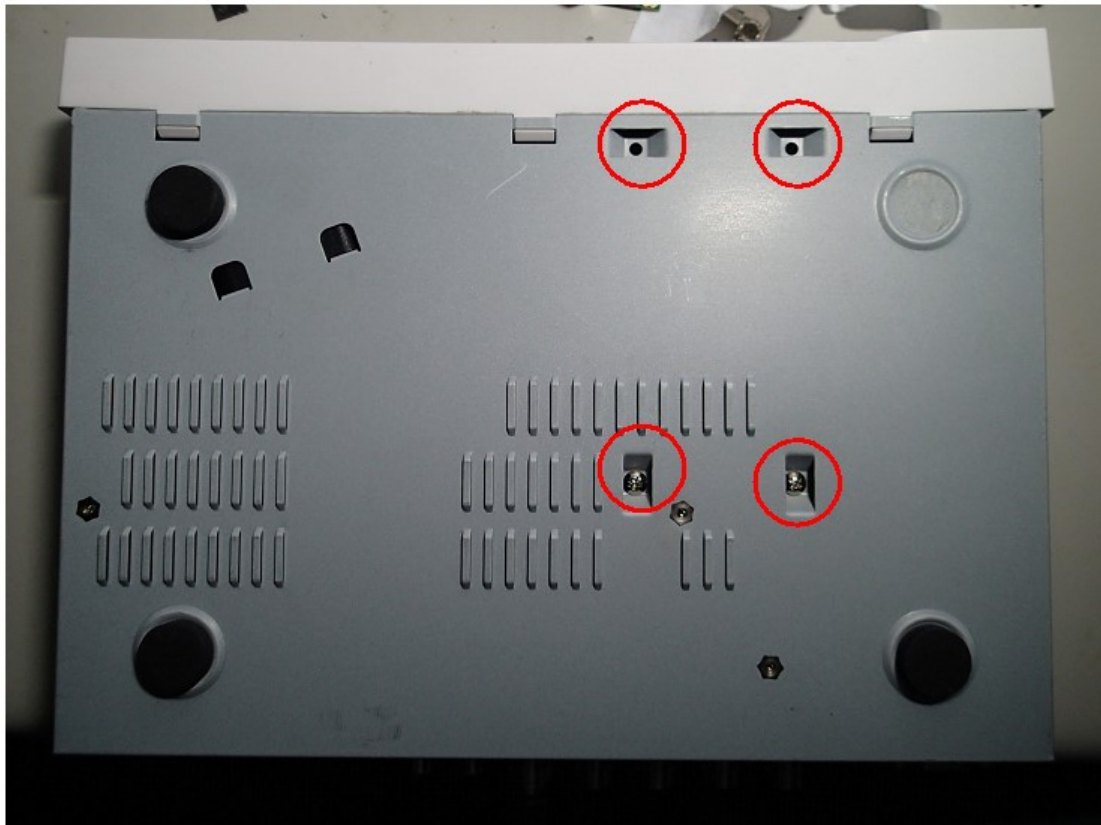


Step 4) Put the cover back and fix it with the 3 screws as Step 1 indicated.

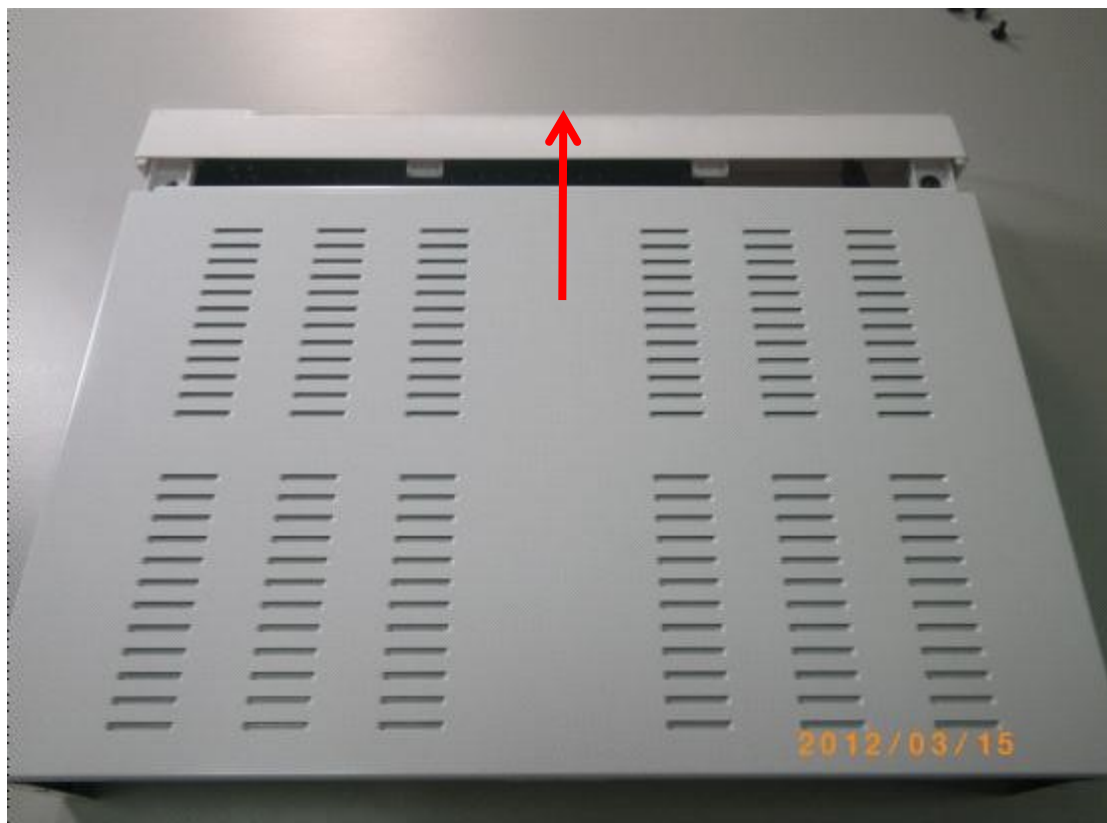

Note: After installation, please initialize Hard Disk before starting to record. For more detailed Please check out User Manual Utility Setup for reference.

3

FRONT PANEL CONTROLS

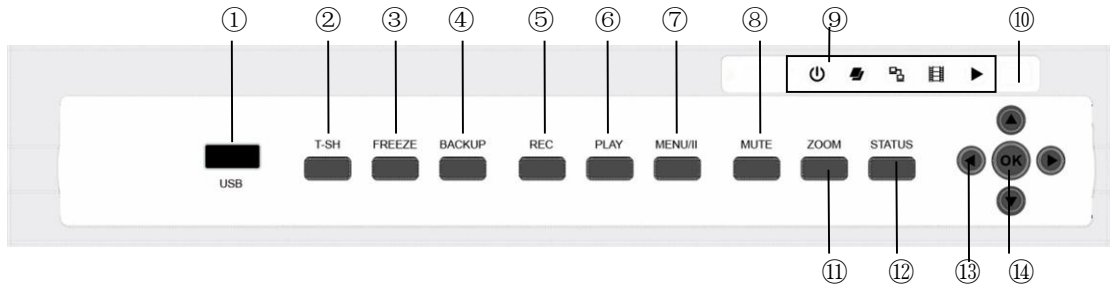


① USB 2.0	Port for USB external devices
② T-SRH	Display the search menu.
③ FREEZE	In LIVE mode, freeze the screen.
④ BACKUP	In LIVE mode, press to display the BACKUP menu.
⑤ REC	Start or stop recording.
⑥ PLAY	Play back in normal speed.
⑦ MENU/II	In LIVE mode, press to display menu. In PLAYBACK mode, press to pause playback.
⑧ MUTE	Enable / Disable key tone.
⑨ LED Display	Power: Power is on. HDD: Hard disk is in use. LAN: Connected to the internet (<i>in red:</i> Remote user logged in). REC: Recording. PLAY: Playing back.
⑩ IR Sensor	Input sensor for the remote control.
⑪ ZOOM	In LIVE or PLAYBACK mode, enlarge the display of a channel.
⑫ STATUS	In LIVE mode, display STATUS menu.
⑬ Arrow Keys	▲ : In SETUP mode, press to move cursor up. In PLAYBACK mode, press to slow down. ▼ : In SETUP mode, press to move cursor down. In PLAYBACK mode, press to stop playing back. ▶ : In SETUP mode, press to increase value. In PLAYBACK mode press to play forwards. ◀ : In SETUP mode, press to reduce value. In PLAYBACK mode, press to play rewind.
⑭ OK	In SETUP mode, press to enter sub menu. In Live mode, switch to full screen display.

4

REAR PANEL CONNECTORS

4CH REAR PANEL CONNECTORS

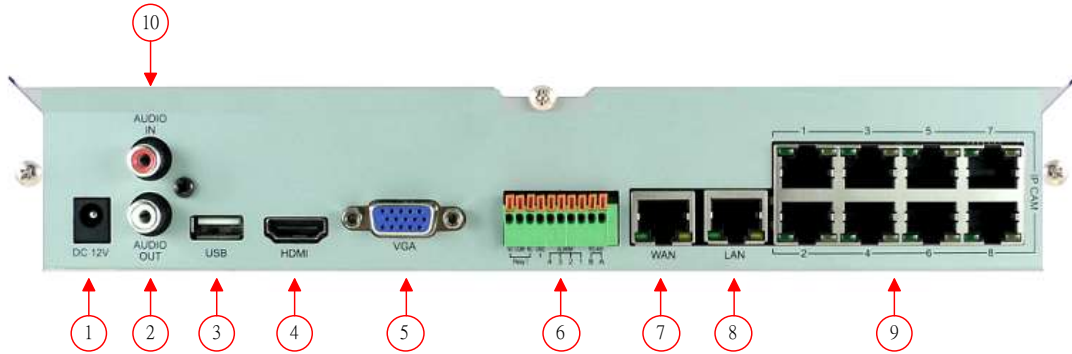

1. DC 12V	Socket for a DC 12V input.
2. AUDIO OUT	RCA output port for audio signal.
3. USB	Port for USB mouse device (Front port for USB external devices)
4. HDMI	HDMI port.
5. VGA	VGA port.
6. EXTERNAL I/O	External I/O port.
7. WAN	Connect Router or Internet
8. LAN	Connect PC
9. IP CAM	Connect IP
10. AUDIO IN	RCA input port for audio signal.